





COS 001 (LRV = 68)



COS 006 (LRV = 42)




COS 017 (LRV = 72)



COS 007 (LRV = 21)



COS 021 (LRV = 53)

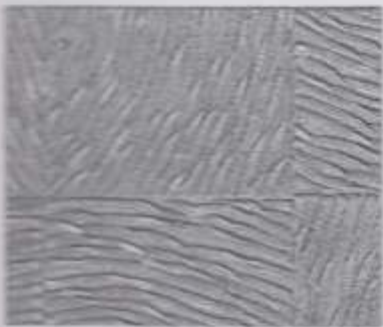

COS 002 (LRV = 29.4)



COS 018 (LRV = 34)



COS 004 (LRV = 6)



COS 019 (LRV = 24)




COS 008 (LRV = 6)



COS 003 (LRV = 11)



COS 020 (LRV = 17)

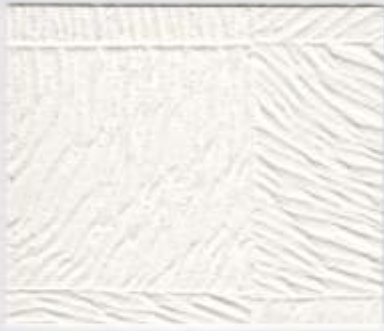

COS 005

(LRV = 83)



COS 013

(LRV = 73)



COS 009

(LRV = 78)



COS 015

(LRV = 29)



COS 014

(LRV = 54)



COS 010

(LRV = 67)



COS 011

(LRV = 36)



COS 022

(LRV = 42)



COS 016

(LRV = 13)



COS 012

(LRV = 9)



COS 024

(LRV = 5)



COS 023

(LRV = 7)

# TECHNICAL INFORMATION



## Physical Properties:

Total Weight: 400g/m<sup>2</sup> (nominal)

Vinyl Weight: 310g/m<sup>2</sup> (nominal)

Substrate Type: Non Woven Fabric

Substrate Weight: 90g/m<sup>2</sup> (nominal)

## Type II and other specifications available

Tensile Strength: MD 40 N/cm (nominal)

TD 30 N/cm (nominal)

Tear Strength: 4500 mN (nominal)



## Roll Size:

130cm x 30m – cut lengths available



## Pattern Repeat:

Vertical: 65mm

Horizontal: 1280mm



## Fire Rating:

Class 'O' to the requirements of Approved Document B of the British Building Regulations (Class 1, BS476 Part 7). Euroclass B - s2, d0. Class A ASTM E-84 Tunnel Test.



## Adhesive:

Fabric backed vinyls – Newmor Heavy. Varies with substrate – please enquire.



## Bacteria Resistance:

Contains an active fungicide.



## Light Fast:

Excellent Light Fastness

BS EN ISO 105-B02 7/8.

LRV = Light Reflective Value

## Specifications:

Conforms to requirements of BS EN 15102, BS EN 259 and WA – Quality Standard W-101.

## Stain/Chemical Resistance:

Pass ASTM D-1308-1987 Federal Spot Test. Resistant to temporary staining of oils, fats, mild acids and alkalis.

## Quality Assurance:

Our management systems and production procedures comply with ISO 9001, the internationally recognised Quality Standard.

## Availability:

Every product stocked in depth. 5.00pm deadline for next day delivery. (UK only)

## Origin:

Designed, coloured, manufactured and stocked in the UK.

## Warranty:

Newmor offers a five year warranty against manufacturing defects. Full details available on application.

## Samples:

Larger samples are readily available on request.

## Maintenance:

Fully washable and in most cases products can be scrubbed repeatedly to remove any marks without damaging the product itself. Most products are also able to withstand the use of chlorine releasing agent solutions.

Customise this design



youchoose™

Our Unique Re-Colouration Service

[www.newmor.com](http://www.newmor.com)



BCFA  
member



British Product | Global Support

[www.newmor.com](http://www.newmor.com)

PREMIER COLLECTION