

GND 2250 (LRV = 78)



GND 2246 (LRV = 57)




GND 2245 (LRV = 53)



GND 2248 (LRV = 52)



GND 2249 (LRV = 43)

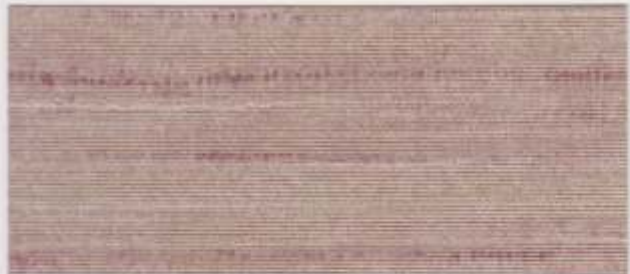

GND 2243 (LRV = 36)



GND 2244 (LRV = 34)



GND 2247 (LRV = 26)




GND 2244 (LRV = 34)



GND 2241 (LRV = 8)



GND 2219 (LRV = 16)

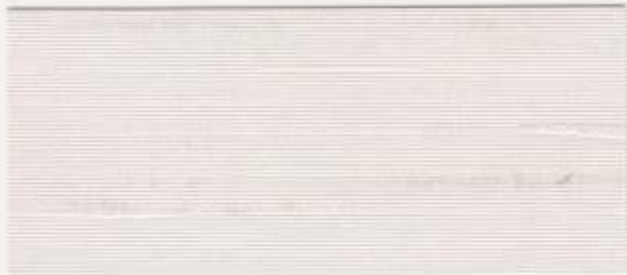

GND 2238 (LRV = 73)



GND 2225 (LRV = 82)



GND 2232 (LRV = 48)




GND 2207 (LRV = 74)



GND 2213 (LRV = 62)



GND 2251 (LRV = 23)

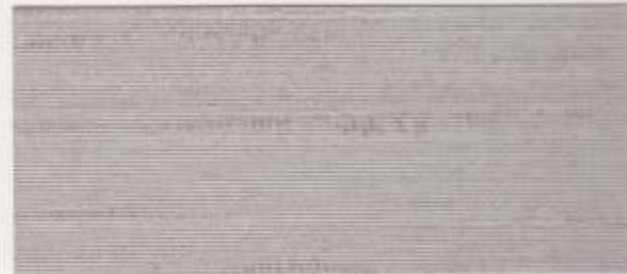

GND 2216 (LRV = 46)



GND 2242 (LRV = 38)



GND 2233 (LRV = 41)



GND 2226 (LRV = 6)

LRV = Light reflective value

TECHNICAL INFORMATION



Physical properties

Total weight: 460g/m² (nominal)

Vinyl Weight: 370g/m² (nominal)



Substrate Type: Non Woven Fabric

Substrate weight: 90g/m² (nominal)

Type II and other specifications available

Tensile Strength: MD 80 N/cm (nominal)

TD 60 N/cm (nominal)

Tear Strength: 8500 mN (nominal)



Roll size:

130cm x 30m - cut lengths available



Pattern Repeat

Vertical: Free match

Horizontal: 1300mm



Fire Rating:

Class 'O' to the requirements of Approved Document B of the British Building Regulations (Class 1, BS 476 part 7).

Euroclass B - s2, d0. Class A ASTM E-84 Tunnel Test.



Adhesive:

Fabric backed vinyls - Newmor Heavy. Varies with substrate - please enquire.



Bacteria Resistance:

Contains an active fungicide.



Light Fast:

Excellent Light Fastness

BS EN ISO 105-B02 7/8

LRV = Light reflective value

Specifications

Conforms to requirements of BS EN 15102, BS EN 259 and WA - Quality Standard W-101.

Stain/Chemical Resistance:

Pass ASTM D-1308-1987 Federal Spot Test.

Resistant to temporary staining of oils, fats, mild acids and alkalis.

Quality Assurance:

Our management systems and production procedures comply with ISO 9001, the internationally recognised Quality Standard.

Availability:

Every product stocked in depth. 5.00pm deadline for next day delivery. (UK only)

Origin:

Designed, coloured, manufactured and stocked in the UK.

Warranty:

Newmor offers a five year warranty against manufacturing defects. Full details available on application.

Samples:

Larger samples are readily available on request.

Maintenance:

Fully washable and in most cases products can be scrubbed repeatedly to remove any marks without damaging the product itself. Most products are also able to withstand the use of chlorine releasing agent solutions.

Customise this design



youchoose

Our Unique Re-Colouration Service

www.newmor.com



BCFA
member



British Product | Global Support

www.newmor.com

PREMIER COLLECTION