





DEL 202

(LRV = 53)



DEL 233

(LRV = 28)




DEL 237

(LRV = 15)



DEL 235

(LRV = 30)

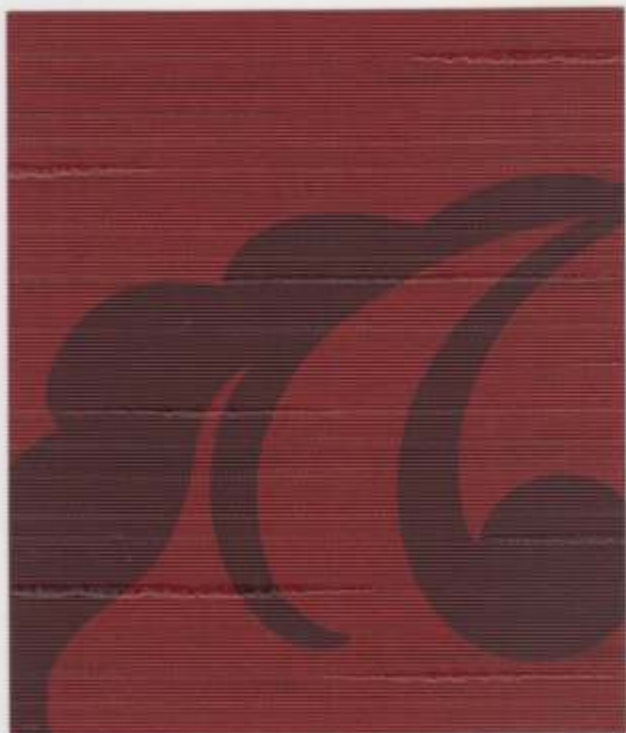

DEL 236

(LRV = 9)




DEL 234

(LRV = 32)



DEL 225

(LRV = 71)

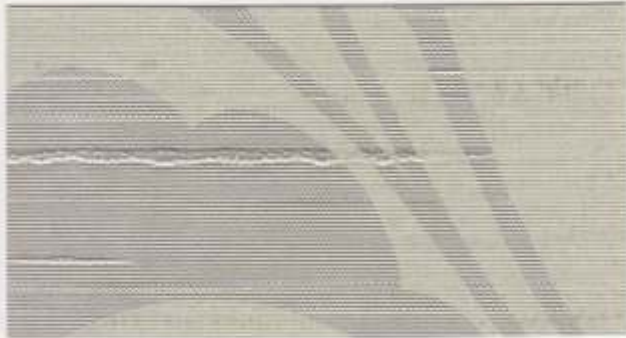

DEL 242

(LRV = 50)



DEL 232


(LRV = 50)



DEL 243

LRV = Light reflective value

(LRV = 27)

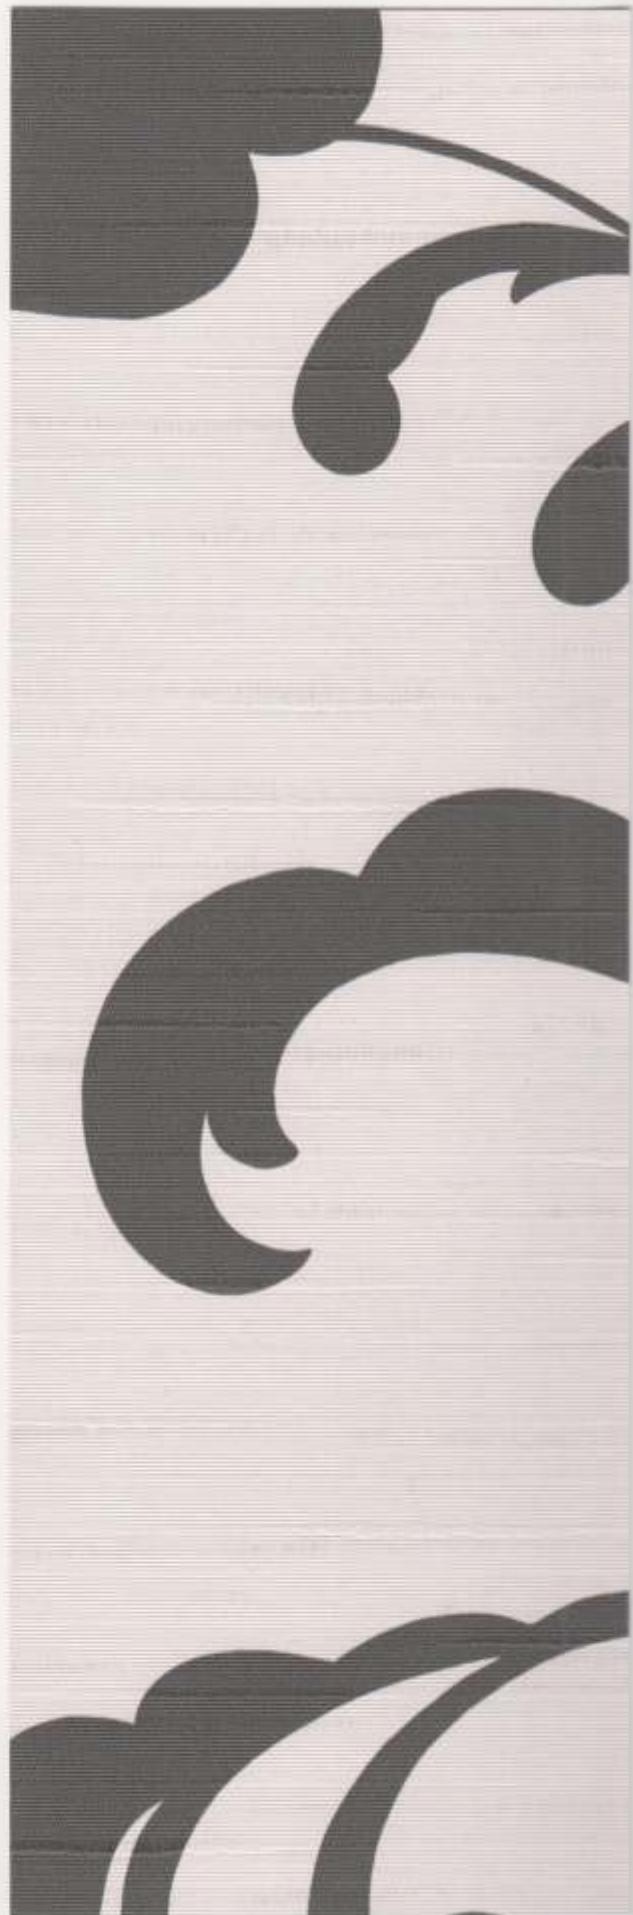

DEL 238

(LRV = 42)

TECHNICAL INFORMATION



Physical properties

Total weight: 400g/m² (nominal)

Vinyl Weight: 310g/m² (nominal)



Substrate Type: Non Woven Fabric

Substrate weight: 90g/m² (nominal)

Type II and other specifications available

Tensile Strength: MD 40 N/cm (nominal)

TD 30 N/cm (nominal)

Tear Strength: 4500 mN (nominal)



Roll size:

130cm x 30m - cut lengths available



Pattern Repeat

Vertical: 530mm

Horizontal: 610mm



Fire Rating:

Class 'O' to the requirements of Approved

Document B of the British Building

Regulations (Class 1, BS 476 part 7).

Euroclass B - s2, d0. Class A ASTM E-84

Tunnel Test.



Adhesive:

Fabric backed vinyls - Newmor Heavy.

Varies with substrate - please enquire.



Bacteria Resistance:

Contains an active fungicide.



Light Fast:

Excellent Light Fastness

BS EN ISO 105-B02 7/8

LRV = Light reflective value

Specifications

Conforms to requirements of BS EN 15102,
BS EN 259 and WA - Quality Standard W-101.

Stain/Chemical Resistance:

Pass ASTM D-1308-1987 Federal Spot Test.

Resistant to temporary staining of oils,
fats, mild acids and alkalis.

Quality Assurance:

Our management systems and production
procedures comply with ISO 9001, the
internationally recognised Quality
Standard.

Availability:

Every product stocked in depth.

5.00pm deadline for next day delivery.

(UK only)

Origin:

Designed, coloured, manufactured and
stocked in the UK.

Warranty:

Newmor offers a five year warranty

against manufacturing defects.

Full details available on application.

Samples:

Larger samples are readily available on

request.

Maintenance:

Fully washable and in most cases products

can be scrubbed repeatedly to remove any
marks without damaging the product itself.

Most products are also able to withstand
the use of chlorine releasing agent solutions.

Customise this design



youchoose

Our Unique Re-Colouration Service

www.newmor.com



BCFA
member



British Product | Global Support

www.newmor.com

STUDIO COLLECTION