

HERRINGBONE

A tactile tweed design inspired by British tailoring and traditional artisanal weaving techniques.




HRB 115

(LRV = 23)



HRB 109

(LRV = 52)

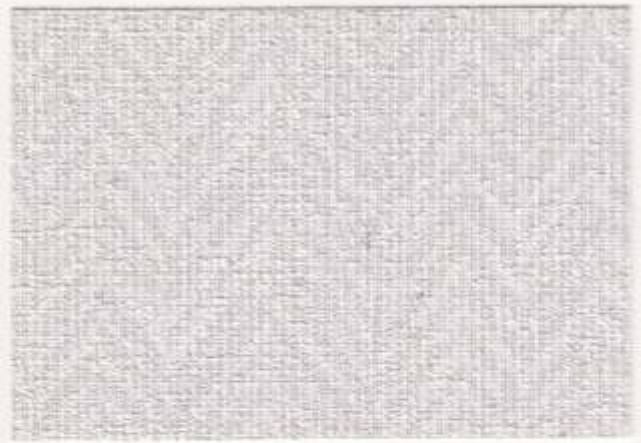


HRB 113

(LRV = 66)



HRB 110

(LRV = 49)

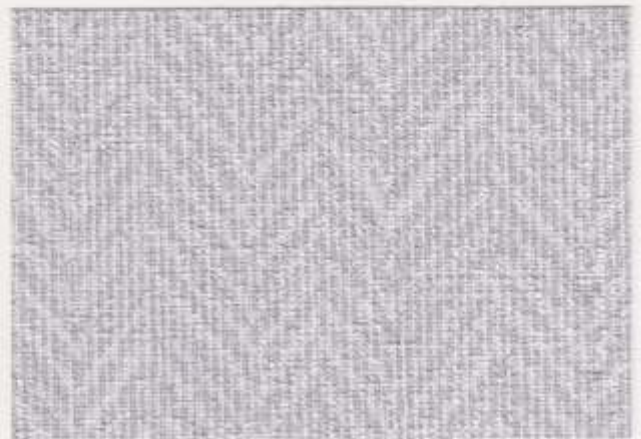

HRB 114

(LRV = 54)




HRB 111

(LRV = 32)



HRB 115

(LRV = 23)

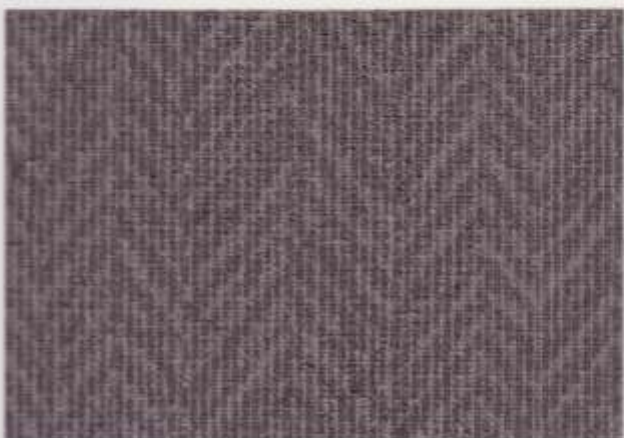

HRB 112


(LRV = 13)



HRB 116

(LRV = 10)

HERRINGBONE

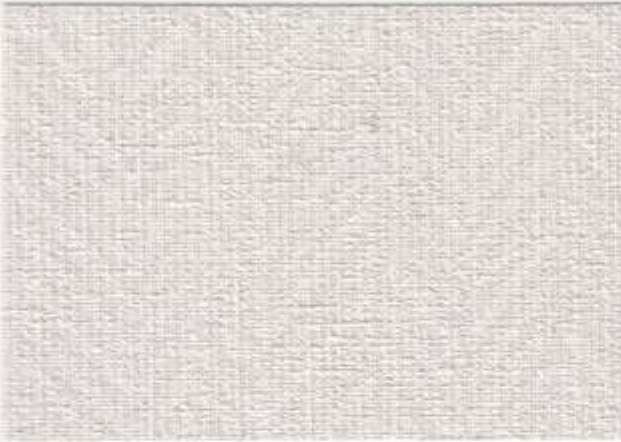

HRB 101

(LRV = 69)



HRB 105

(LRV = 62)



HRB 102

(LRV = 49)



HRB 106

(LRV = 53)



HRB 103

(LRV = 41)



HRB 107

(LRV = 43)



HRB 104

(LRV = 16)



HRB 108

(LRV = 19)

LRV = Light reflective value

TECHNICAL INFORMATION



Physical properties

Total weight: 400g/m² (nominal)
Vinyl Weight: 310g/m² (nominal)
Substrate Type: Non Woven Fabric
Substrate weight: 90g/m² (nominal)



Other specifications available

Tensile Strength: MD 40 N/cm (nominal)
TD 30 N/cm (nominal)
Tear Strength: 4500 mN (nominal)



Roll size:

130cm x 30m - cut lengths available



Pattern Repeat

Vertical: Free match
Horizontal: None



Fire Rating:

Class "O" to the requirements of Approved Document B of the British Building Regulations (Class 1, BS 476 part 7). Euroclass B - s2, d0. Class A ASTM E-84 Tunnel Test.



Adhesive:

Fabric backed vinyls - Newmor Heavy.
Varies with substrate - please enquire.



Bacteria Resistance:

Contains an active Fungicide.



Light Fast:

Excellent Light Fastness
BS EN ISO 105-B02 7/8

LRV = Light reflective value

Specifications

Conforms to requirements of BS EN 15102, BS EN 259 and WA - Quality Standard W-101.

Stain/Chemical Resistance:

Pass ASTM D-1308-1987 Federal Spot Test.
Resistant to temporary staining of oils, fats, mild acids and alkalis.

Quality Assurance:

Our management systems and production procedures comply with ISO 9001, the internationally recognised Quality Standard.

Availability:

Every product stocked in depth.
5.00pm deadline for next day delivery.
(UK only)

Origin:

Designed, coloured, manufactured and stocked in the UK.

Warranty:

Newmor offers a five year warranty against manufacturing defects.
Full details available on application.

Samples:

Larger samples are readily available on request.

Maintenance:

Fully washable and in most cases products can be scrubbed repeatedly to remove any marks without damaging the product itself. Most products are also able to withstand the use of chlorine releasing agent solutions.

Customise this design



youchoose

Our Unique Re-Colouration Service

www.newmor.com



BCFA
member



British Product Global Support

www.newmor.com

PREMIER COLLECTION