



MAN 009


(LRV = 15) BST 026

(LRV = 10)



MAN 006

(LRV = 8)

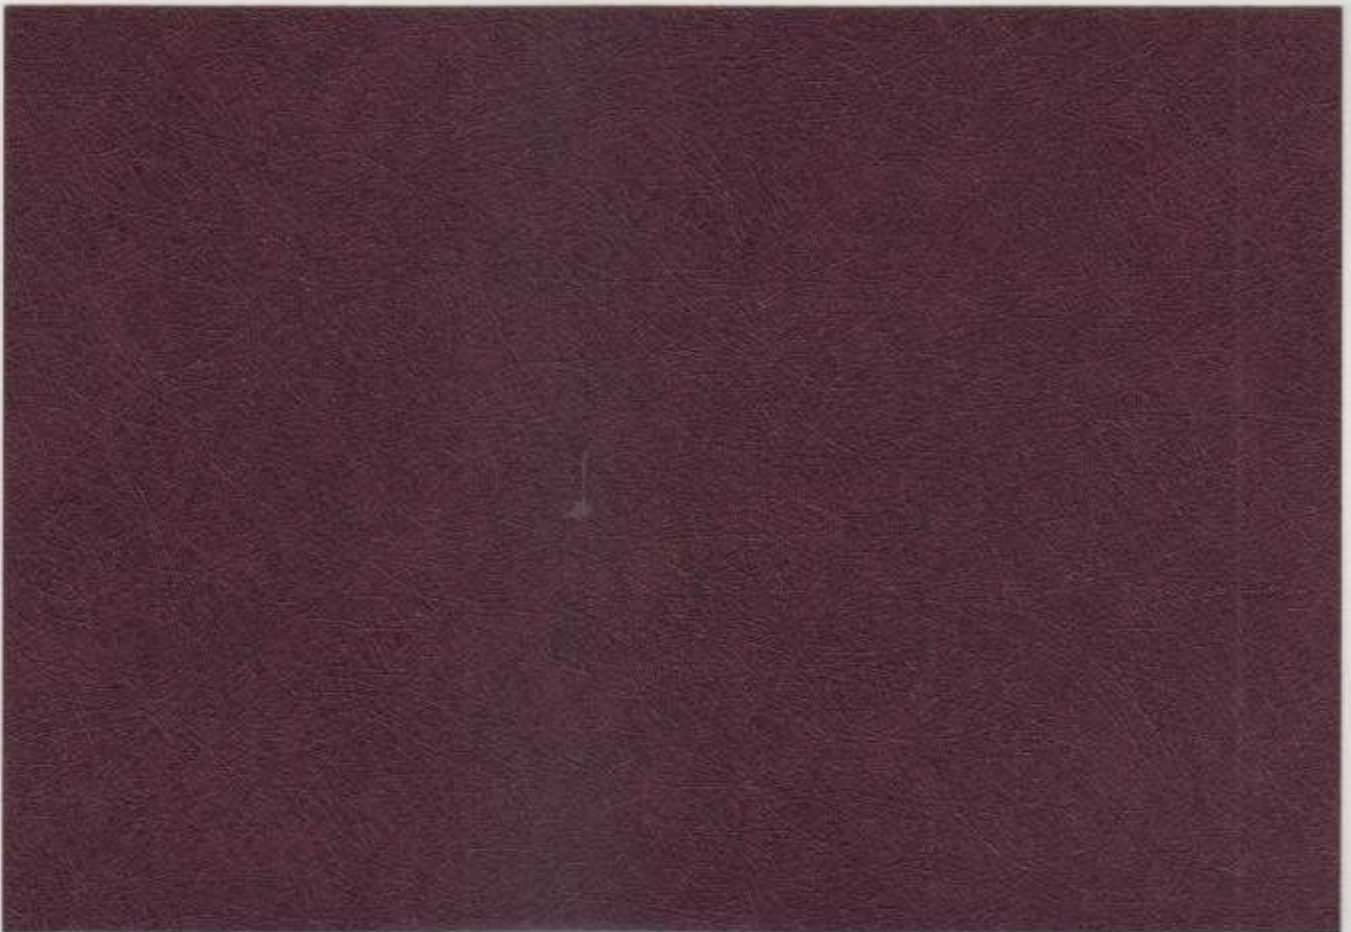


BST 038

(LRV = 6)

MANHATTAN/BRUSHED STEEL



BST 033 (LRV = 81)

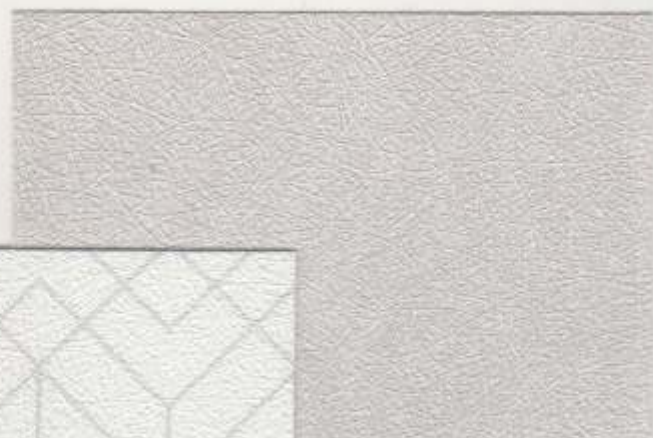

BST 034 (LRV = 67)



MAN 001 (LRV = 80)



BST 023 (LRV = 30)



MAN 002 (LRV = 29)



BST 035 (LRV = 58)



BST 036 (LRV = 6)



MAN 003 (LRV = 8)



BST 013 (LRV = 23)



BST 017 (LRV = 5)
LRV = Light reflective value



BST 029 (LRV = 10)



BST 016 (LRV = 63)



BST 024 (LRV = 76)



BST 007 (LRV = 63)



MAN 004 (LRV = 60)



BST 015 (LRV = 53)



BST 037 (LRV = 20)



MAN 005 (LRV = 21)



BST 019 (LRV = 31)



BST 002 (LRV = 15)



MAN 006 (LRV = 8)



BST 038 (LRV = 6)

PREMIER COLLECTION



BST 028 (LRV = 63)



BST 039 (LRV = 59)



MAN 007 (LRV = 56)



BST 027 (LRV = 28)



BST 022 (LRV = 27)



MAN 008 (LRV = 35)




BST 041 (LRV = 14)



BST 040 (LRV = 19)



MAN 009 (LRV = 15)

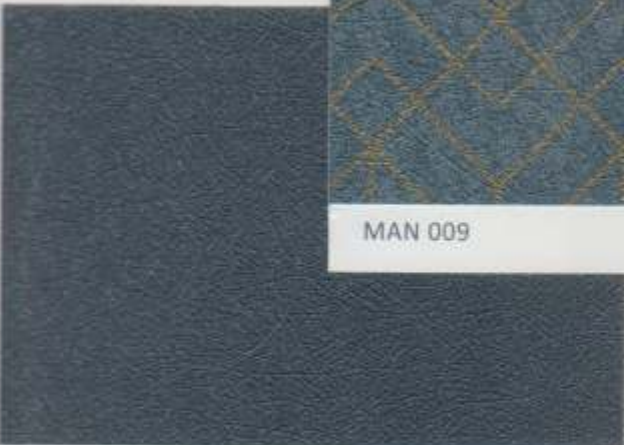

BST 026 (LRV = 10)



BST 021 (LRV = 12)



BST 008 (LRV = 67)



BST 012 (LRV = 73)



MAN 010 (LRV = 66)



BST 042 (LRV = 62)



BST 032 (LRV = 54)



MAN 011 (LRV = 48)



BST 020 (LRV = 61)



BST 043 (LRV = 52)



MAN 012 (LRV = 36)



BST 018 (LRV = 24)



BST 030 (LRV = 22)



LRV = Light reflective value

TECHNICAL INFORMATION



Physical properties

Total weight: 400g/m² (nominal)

Vinyl Weight: 310g/m² (nominal)



Substrate Type: Non Woven Fabric

Substrate weight: 90g/m² (nominal)

Type II and other specifications available

Tensile Strength: MD 40 N/cm (nominal)

TD 30 N/cm (nominal)

Tear Strength: 4500 mN (nominal)



Roll size:

130cm x 30m - cut lengths available



Pattern Repeat

Brushed Steel

Vertical: Free match

Horizontal: Free match

Manhattan

Vertical: Straight match

Horizontal: None



Fire Rating:

Class 'O' to the requirements of Approved

Document B of the British Building

Regulations (Class 1, BS 476 part 7).

Euroclass B - s2, d0. Class A ASTM E-84

Tunnel Test.



Adhesive:

Fabric backed vinyls - Newmor Heavy.

Varies with substrate - please enquire.



Bacteria Resistance:

Contains an active fungicide.



Light Fast:

Excellent Light Fastness

BS EN ISO 105-B02 7/8

LRV = Light reflective value

Specifications

Conforms to requirements of BS EN 15102,
BS EN 259 and WA - Quality Standard W-101.

Stain/Chemical Resistance:

Pass ASTM D-1308-1987 Federal Spot Test.

Resistant to temporary staining of oils,
fats, mild acids and alkalis.

Quality Assurance:

Our management systems and production
procedures comply with ISO 9001, the
internationally recognised Quality
Standard.

Availability:

Every product stocked in depth.
5.00pm deadline for next day delivery.
(UK only)

Origin:

Designed, coloured, manufactured and
stocked in the UK.

Warranty:

Newmor offers a five year warranty
against manufacturing defects.
Full details available on application.

Samples:

Larger samples are readily available on
request.

Maintenance:

Fully washable and in most cases products
can be scrubbed repeatedly to remove any
marks without damaging the product itself.
Most products are also able to withstand
the use of chlorine releasing agent solutions.

Customise this design



youchoose

Our Unique Re-Colouration Service

www.newmor.com



PM 238533

BCFA
member



British Product / Global Support

www.newmor.com

PREMIER COLLECTION