

SEM 007

(LRV = 73)



SEM 008

(LRV = 62)




SEM 009

(LRV = 49)




SEM 010

(LRV = 45)

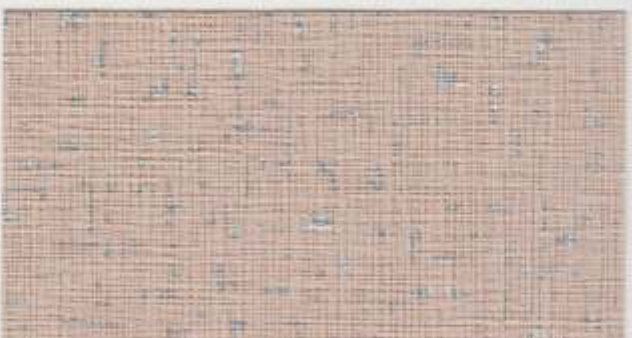

SEM 011

(LRV = 48)

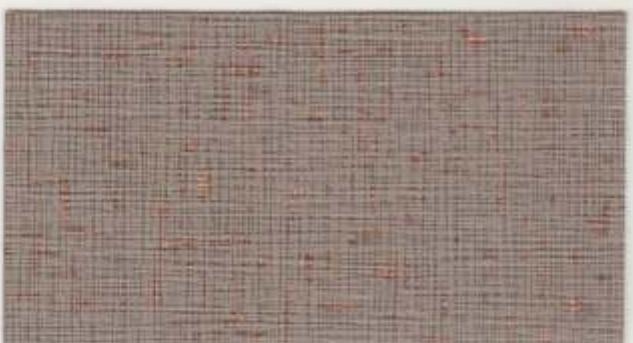


SEM 012

(LRV = 26)



SEM 013

(LRV = 24)

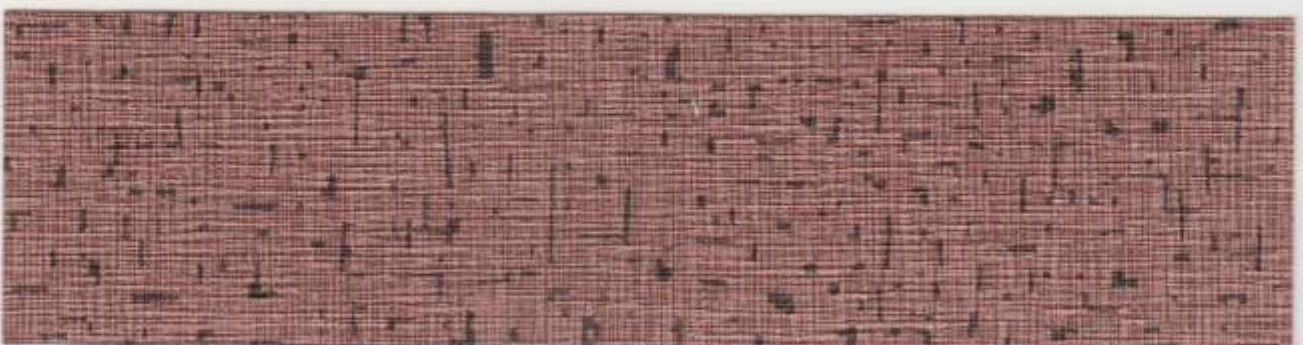

SEM 001

(LRV = 26)



SEM 014

(LRV = 77)



SEM 002

(LRV = 33)



SEM 004

(LRV = 31)



SEM 003

(LRV = 20)



SEM 005

(LRV = 14)



SEM 006

(LRV = 7)

LRV = Light reflective value

TECHNICAL INFORMATION



Physical properties

Total weight: 400g/m² (nominal)
Vinyl Weight: 360g/m² (nominal)
Substrate Type: 100% Woven Cotton
- Cotton Scrim



Substrate weight: 40g/m² (nominal)

Type II and other specifications available

Tensile Strength: MD 40 N/cm (nominal)
TD 30 N/cm (nominal)
Tear Strength: 4500 mN (nominal)



Roll size:

130cm x 30m - cut lengths available



Pattern Repeat

Free match



Fire Rating:

Class 'O' to the requirements of Approved Document B of the British Building Regulations. Euroclass B - s2, d0.
Class A ASTM E-84 Tunnel Test.



Adhesive:

Fabric backed vinyls - Newmor Heavy.
Varies with substrate - please enquire.



Bacteria Resistance:

Contains an active Fungicide.



Light Fast:

Excellent Light Fastness
BS EN ISO 105-B02 min. 6

LRV = Light reflective value

Specifications

Conforms to requirements of BS EN 15102,
BS EN 259 and WA - Quality Standard W-101.

Stain/Chemical Resistance:

Pass ASTM D-1308-1987 Federal Spot Test.
Resistant to temporary staining of oils,
fats, mild acids and alkalis.

Quality Assurance:

Our management systems and production procedures comply with ISO 9001 : 2015, the internationally recognised Quality Standard.

Availability:

Every product stocked in depth.
5.00pm deadline for next day delivery.
(UK only)

Origin:

Designed, coloured, manufactured and stocked in the UK.

Warranty:

Newmor offers a five year warranty against manufacturing defects.
Full details available on application.

Samples:

Larger samples are readily available on request.

Maintenance:

Fully washable and in most cases products can be scrubbed repeatedly to remove any marks without damaging the product itself. Also able to withstand the use of chlorine cleaning agents.

Customise this design



youchoose

Our Unique Re-Colouration Service

www.newmor.com



BSI 22833

BCFA
member



British Product Global Support

www.newmor.com

PREMIER COLLECTION